Contact Lenses for Real-Time Colorimetric Sensing of Glucose

Danielle Bruen*1, Rami Albatal2, Larisa Florea1 and Dermot Diamond1

¹Insight Centre for Data Analytics, National Centre for Sensor Research, School of Chemical Sciences, Dublin City University, Dublin 9, Ireland.

²Insight Centre for Data Analytics, Dublin City University, Dublin 9, Ireland.




Introduction

Boronic acids (BA) are well-known for their interactions with diol-containing compounds like glucose. Fluorescent moieties are commonly incorporated into a BA derivative's framework to monitor the effect of increased glucose concentrations in a given environment. In this study, a novel carboxylic acid BA derivative, o-COOHBA, has been synthesized and investigated for glucose sensing, in solution and when immobilised onto a polydimethylsiloxane (PDMS) "lens"-like surface. In both cases on increased glucose concentrations, a decrease in fluorescence intensity was observed in the range of 0-10mM in solution and similarly, in the range of 0-5mM when anchored to a PDMS surface, corresponding to the ocular-glucose concentrations for diabetics (~500µM – 5mM). This approach aims to develop smart contact lenses that will allow people suffering from diabetes to track their condition non-invasively.


Sensing Mechanism

OH OH
$$\overline{pK_a 9}$$
 $\overline{pK_a 6}$ $\overline{pK_a 6}$

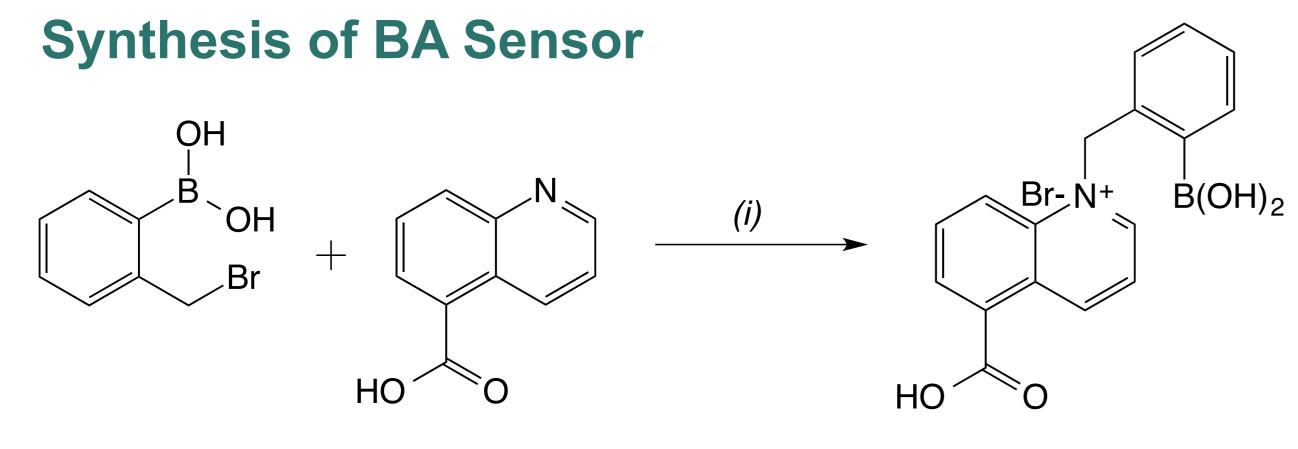


Synthesis of o-COOHBA; (i) anhydrous dimethylsulfoxide, N_2 , 70 °C for 48h. Formation of o-COOHBA was confirmed by ¹H NMR.

PDMS Lens Fabrication

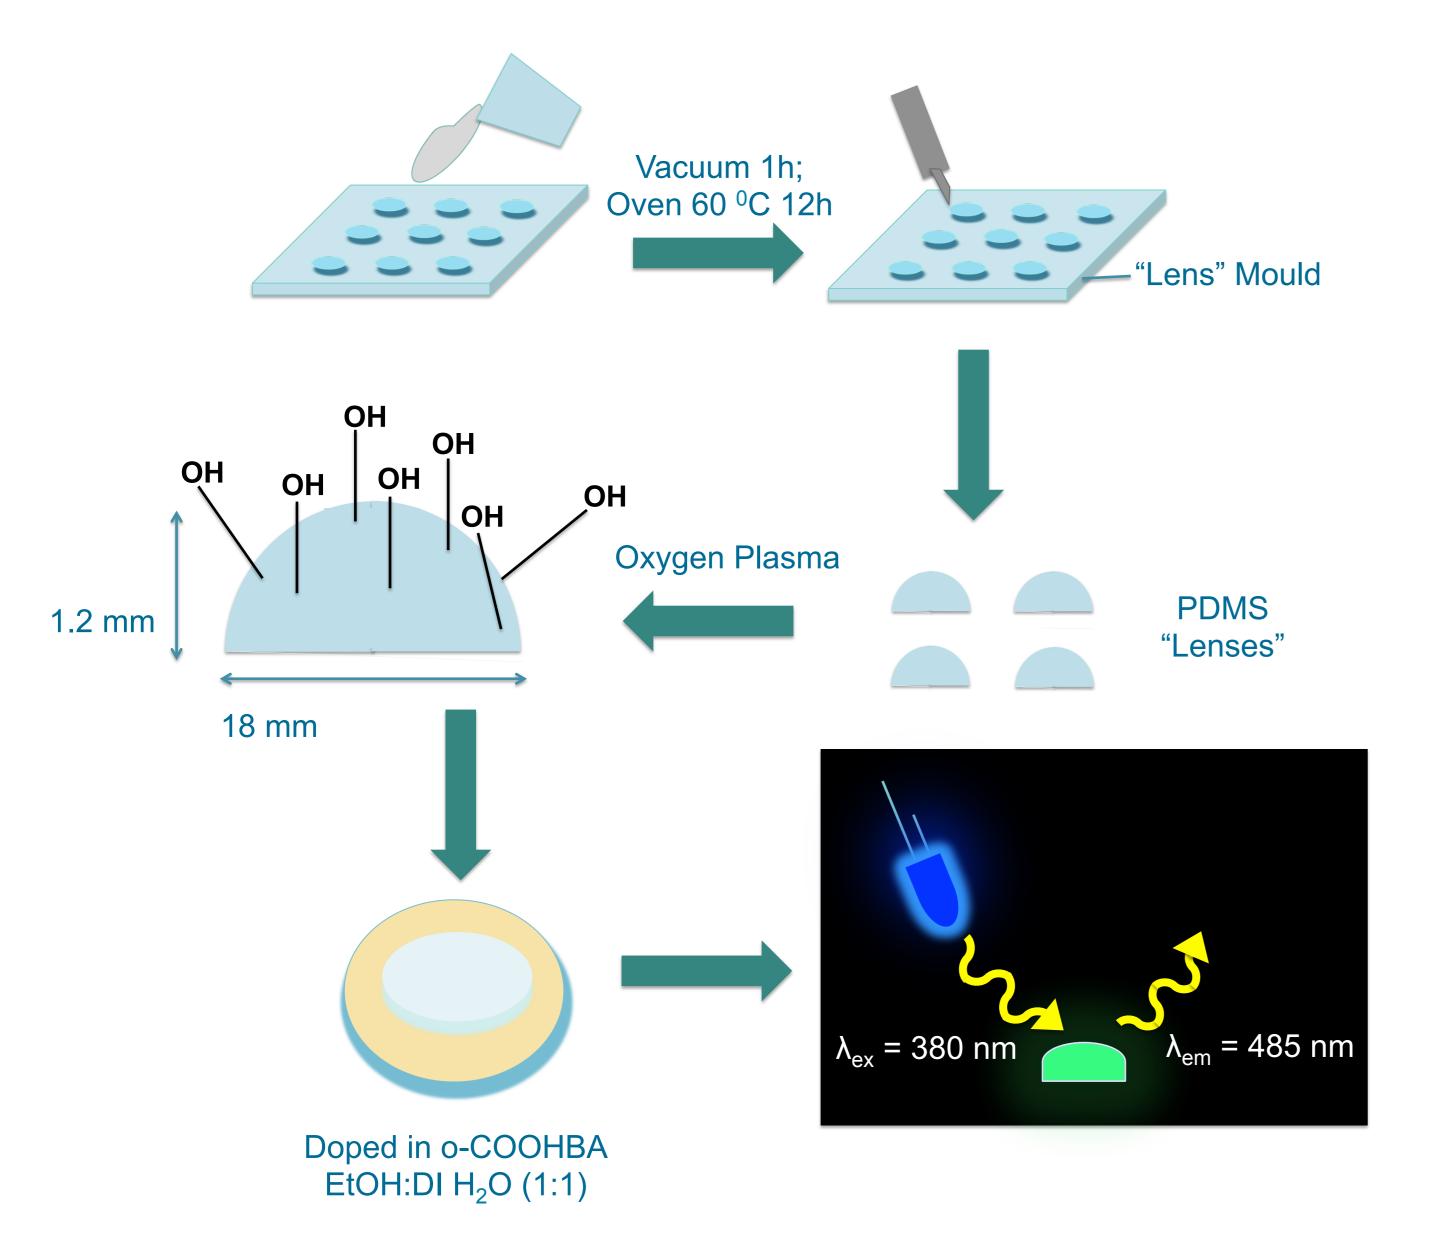


Glucose Sensing

The fluorescence of o-COOHBA has been studied in solution and when anchored to a PDMS surface. o-COOHBA has shown to respond to glucose in the dynamic range of 0-10mM, which corresponds to the ocular-glucose concentration range in diabetics ($\sim 500 \mu M - 5 mM$).

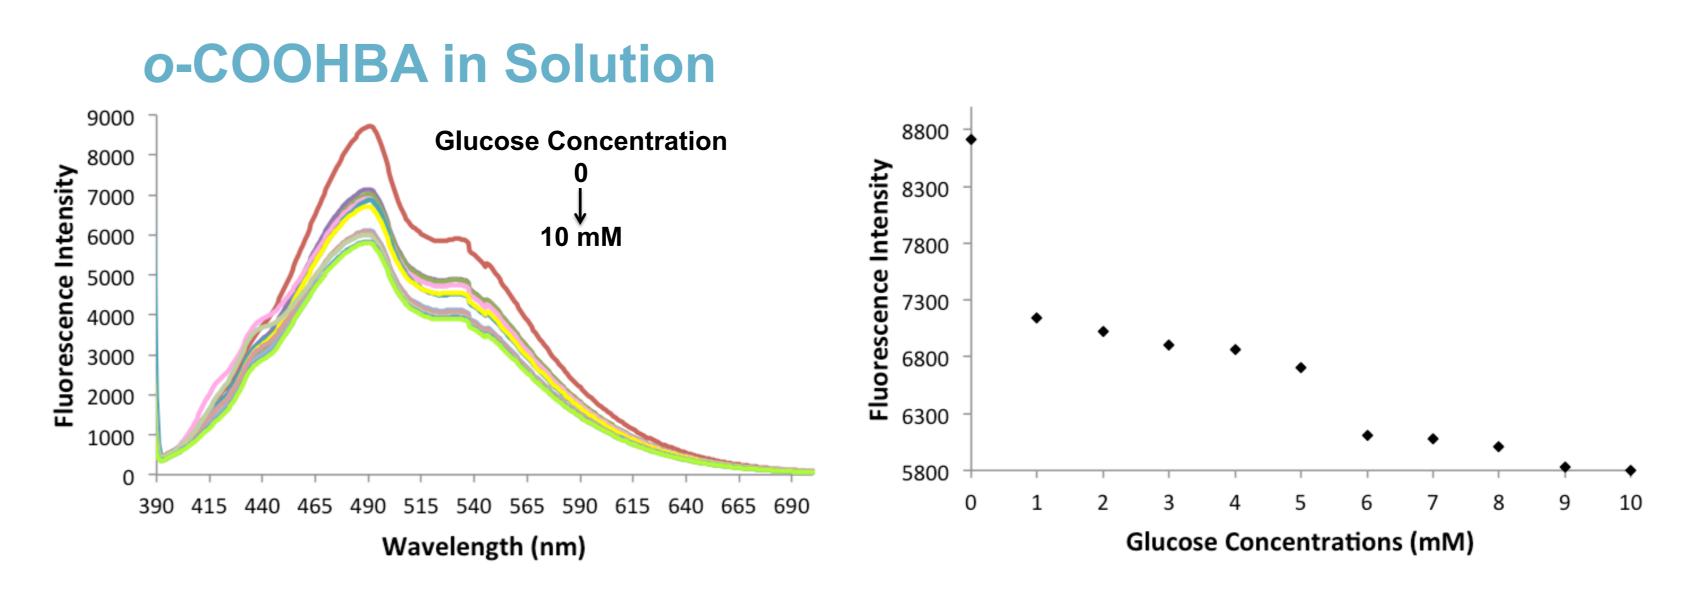

o-COOHBA; 0.5mM in pH 7.4 phosphate buffer Excitation wavelength 380 nm; Emission wavelength: 485 nm

o-COOHBA Immobilized onto PDMS

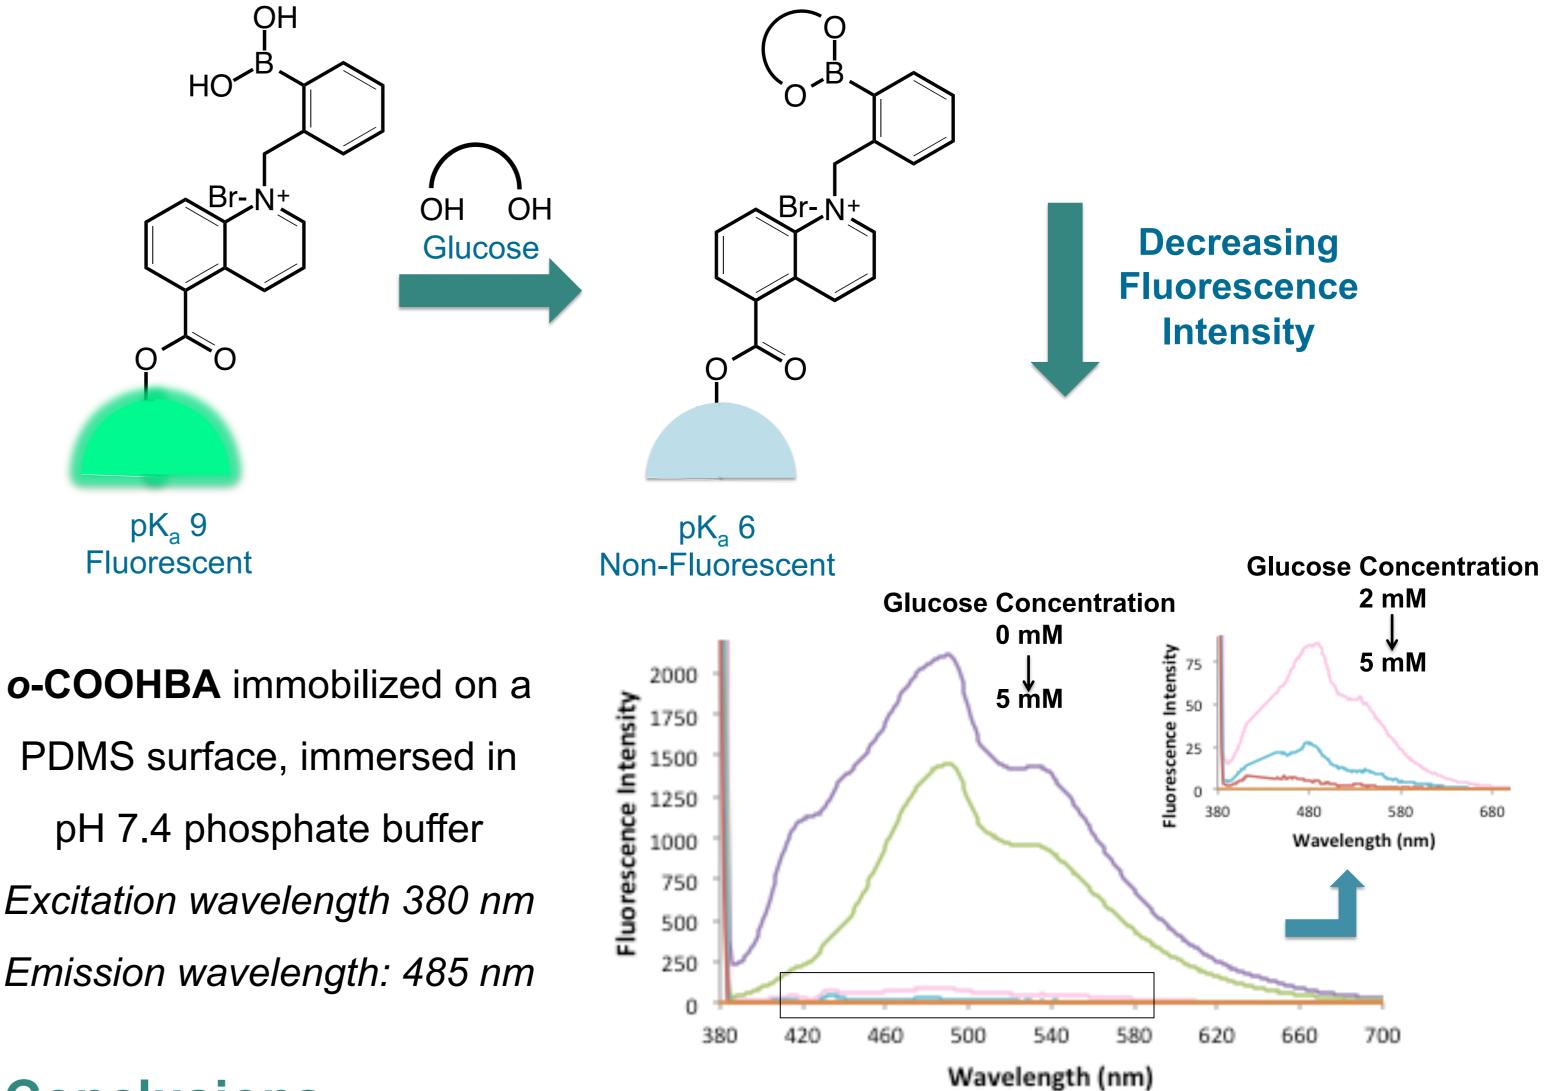

Conclusions

In both solution studies and when anchored on to the PDMS surface, a decrease in fluorescence intensity was observed on increased glucose concentrations. The excitation wavelength of 380 nm is advantageous, as it lies close to the visible-region of the electromagnetic spectrum, which allows for the use of cheap, readily available LEDs as excitation sources. The large Stokes shift of 100 nm is also ideal for a sensing application. The carboxylic acid substituent was also desirable for immobilizing the BA sensor onto a wide variety of polymeric substrates.











